


Bulletin No.	08-004	Issue Date:	9 th April 2008
Issue/Revision:	A2	No. of Pages:	1
Prepared By:	Stefan Arndt	Signature/Date:	<i>S Arndt 9.4.08</i>
Approved By:	Tim Moore	Signature/Date:	<i>T Moore 9.4.08</i>

Subject: Wideband Sub Mini – Spring Loaded Vent Valve.

Summary.

To reduce the risk of deploying Wideband Sub Mini beacons without fully closing the pressure relief valve a spring loaded pressure relief valve has been introduced. The new pressure relief valve has been incorporated in all new units – effective from 25th February 2008. The new pressure relief valve is gold in colour (original valves are red) and is designed to fit flush with the switch end cap name plate when closed.

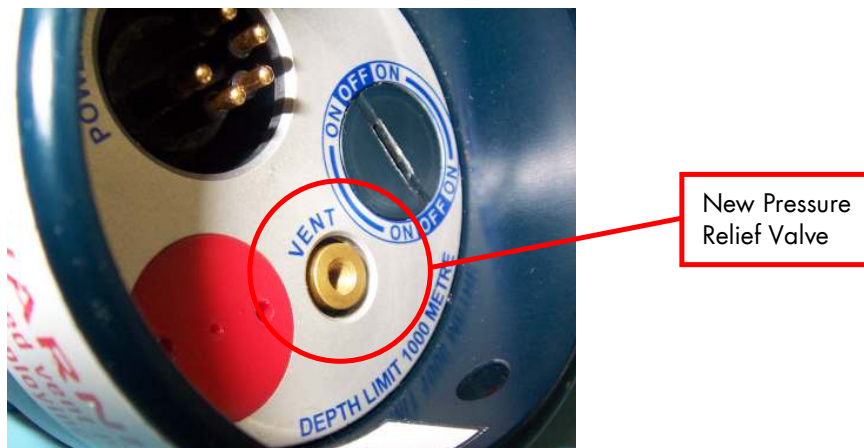

A spares kit 770-1750-SP is available for sale to allow the new spring loaded vent valve to be fitted to existing units. Fitting instructions will be provided with the spares kits and are also available for download on the Sonardyne website. Please follow the below hyperlink to these instructions.

http://www.sonardyne.com/Support/TechnicalBulletin/pdf_files/IG-8070-047-A0%202_.pdf

The spares kit can be used to upgrade the following products:

Type 8070 – WSM (MF Directional – 3000 & 4000m Depth Rated)

Type 8071 – WSM (MF Omni – 1000m Depth Rated)

Please contact your local office for information on pricing and delivery.